
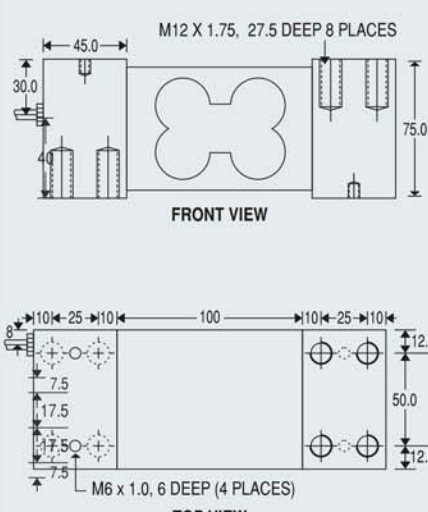


Specification	MODEL 197575
<p>Appearance</p>	
<p>Dimensions</p>	 <p>M12 X 1.75, 27.5 DEEP 8 PLACES</p> <p>FRONT VIEW</p> <p>M6 x 1.0, 6 DEEP (4 PLACES)</p> <p>TOP VIEW</p> <p>All dimensions are in mm</p>
<p>Rated Capacity</p>	<p>1, 1.33, 1.5, 2 ton</p>
<p>Rated Output</p>	<p>2 mV/V ± 10%</p>
<p>Temperature effect on Output</p>	<p>0.002% F.S/°C</p>
<p>Temperature effect on Zero Balance</p>	<p>0.002% F.S/°C</p>
<p>Creep Error (30 min.)</p>	<p>< 0.03%</p>
<p>Zero Balance</p>	<p>± 0.02 mV/V</p>
<p>Input Impedance</p>	<p>395 ± 15Ω</p>
<p>Output Impedance</p>	<p>350 ± 5Ω</p>
<p>Insulation Impedance (DC 50 V)</p>	<p>≥ 5000MΩ</p>
<p>Safe Over load</p>	<p>150% F.S.</p>
<p>Ultimate Overload</p>	<p>250% F.S.</p>
<p>Operating Temperature</p>	<p>-10~60°C</p>
<p>Recommended Excitation</p>	<p>5 ~ 12 V DC</p>
<p>Construction</p>	<p>Steel Alloy</p>
<p>Cable</p>	<p>Φ5mm x 220 cm</p>
<p>Maximum Platform Size</p>	<p>1000 x 1000mm</p>