


Appearance



Dimensions

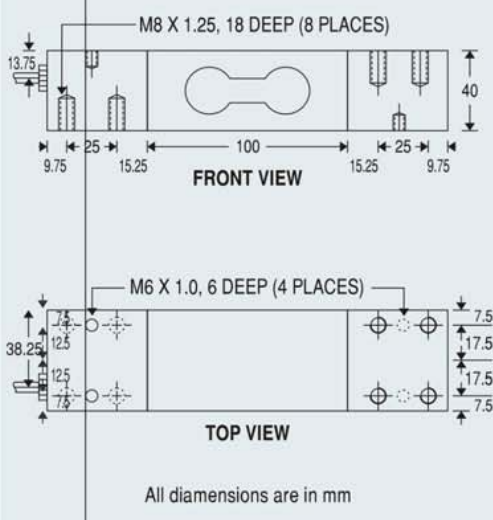

| | |
|------------------------------------|--|
| Rated Capacity | 150, 200, 300, 400, 500, 750, 800, 1000 kg |
| Rated Output | 2 mV/V ± 10% |
| Temperature effect on Output | 0.002% F.S/°C |
| Temperature effect on Zero Balance | 0.002% F.S/°C |
| Creep Error (30 min.) | < 0.03% |
| Zero Balance | ± 0.02 mV/V |
| Input Impedance | 395 ± 15Ω |
| Output Impedance | 350 ± 5Ω |
| Insulation Impedance (DC 50 V) | > 5000MΩ |
| Safe Over load | 150% F.S. |
| Ultimate Overload | 250% F.S. |
| Operating Temperature | -10~60°C |
| Recommended Excitation | 5 ~ 12 V DC |
| Construction | Steel Alloy |
| Cable | Φ5mm x 160 cm / Φ5mm x 220 cm |
| Maximum Platform Size | 750 x 750mm |