
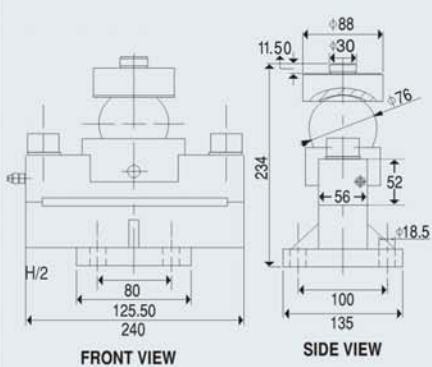


Specification	MODEL 245652
<p>Appearance</p>	
<p>Dimensions</p>	 <p style="text-align: center;">All dimensions are in mm</p>
Rated Capacity	20, 25, 30 ton
Rated Output	2 mV/V \pm 10%
Temperature effect on Output	0.002% F.S./ $^{\circ}$ C
Temperature effect on Zero Balance	0.002% F.S./ $^{\circ}$ C
Creep Error (30 min.)	< 0.03%
Zero Balance	\pm 0.02 mV/V
Input Impedance	750 \pm 20 Ω
Output Impedance	700 \pm 15 Ω
Insulation Impedance (DC 50 V)	>5000M Ω
Safe Over load	150% F.S.
Ultimate Overload	250% F.S.
Operating Temperature	-10~60 $^{\circ}$ C
Recommended Excitation	5 ~12 V DC
Construction	Steel Alloy
Cable	Φ 6mm x 1300 cm
Maximum Platform Size	